


Ceramic salt grinding gear Monopol

Sonderegger Mechanik
 St. Antonstrasse 25
 9413 Oberegg
 Tel. 071/891 38 72 Fax 071/891 37 25
 E-Mail info@somec.ch
 www.somec.ch

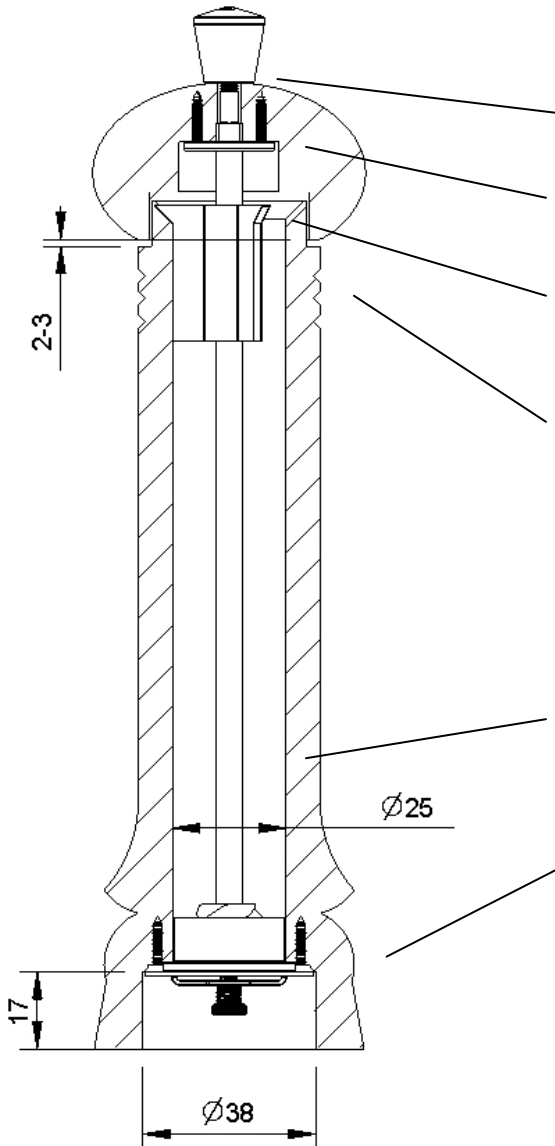

Technical instructions

- Thread for knob has to be 6-8mm longer than the wooden cap
- The assembled driving disk must be able to touch the end of the flat area on the axle
- To assemble the centring Y a chamfer 6x45 is needed
- A gap of 2-3mm between the wooden body and knob is required, to regulate the grain

The M6 thread of the axle must be glued into the ceramic cone, otherwise the ceramic part can break (Araldit)

- The optimal diameter of the inter chamber amounts to 25mm.
- Assembling dimensions of the grinding head

Attention:

The Axle of the Sonderegger pepper grinding gear and the Monopol salt grinding gear are different. Use only the salt grinding gear axle

Parts of the Monopol salt grinding gear

- Brass knob Ø16mm gold or nickel plated
or
Brass knob Ø12mm gold or nickel plated

Driving disc Ø20, 5mm aluminium

Plastic center Y

Axle Ø6mm stainless steel

Lengths on stock

- 92mm
- 144mm
- 185mm
- 204mm

The delivery time of special lengths is about 3 weeks

Ceramic grinding head Monopol

